

# AGILA

## 2475PJI050P40

EAN 4031582050035

Swivel castor with wheel brake, housing made of pressed steel, bright zinc plated, blue passivated, double ball bearing swivel head, axle riveted, plate fitting. Wheel centre made of Polypropylene, Tread: TENTEprene (thermoplastic rubber), grey non-marking, plain bearing



BETTER MOBILITY. BETTER LIFE.




Picture may differ from original product

### Technical Data

|                        |                  |
|------------------------|------------------|
| Wheel diameter         | 50 mm            |
| Wheel width            | 19 mm            |
| Castor width           | 43 mm            |
| Size of Plate          | 60 x 60 mm       |
| Plate hole centres     | 48/38 x 48/38 mm |
| Plate hole             | 6,3 mm           |
| Dome-Ø                 | 41 mm            |
| Offset                 | 24 mm            |
| Swivel Interference    | 164 mm           |
| Overall height         | 69 mm            |
| Temperature            | - 20 / + 60 °C   |
| Standard               | EN_12530         |
| Weight                 | 0.192 kg         |
| Swivel Radius          | 82 mm            |
| Hardness of tread      | Shore A 87       |
| Load capacity          | 40 kg            |
| Load capacity (static) | 80 kg            |

### Structure & Mounting

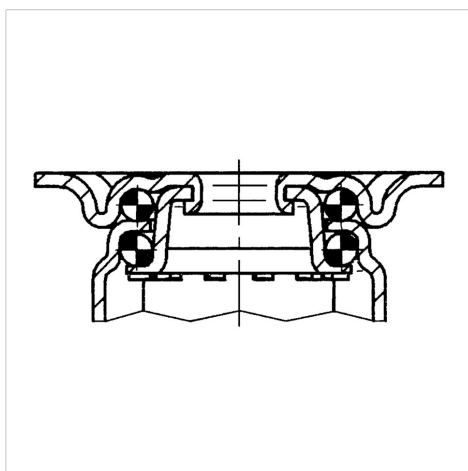

### Advantages at a glance

|                      |           |
|----------------------|-----------|
| Roll performance     | ● ● ● ○ ○ |
| Movement noise       | ● ● ● ○ ○ |
| Attrition            | ● ● ● ○ ○ |
| Corrosion resistance | ● ● ● ○ ○ |

# AGILA

2475PJI050P40

EAN 4031582050035



BETTER MOBILITY. BETTER LIFE.

## Structure & Mounting

